

ALL STEEL CONSTRUCTION. THE STRONGEST CONVEYORS IN THE WORLD.

NESTAFLEX[®]

SMART DESIGNS COME FROM SMART SOLUTIONS.



NESTAFLEX
Altersort

TL2 

HEAVY DUTY 2-STAGE
GRAVITY TRUCK LOADER

The nation's top retailers choose the patented **TL-2 Stage Gravity Trailer Loader** for a reason. Having thousands of the **TL-2** units installed in Distribution Centers across the U.S., our customers report the same results – **INCREASED** productivity, **DECREASED** maintenance cost, **LOWER** labor cost, **LESS** damaged product and **HIGHER** throughput! The **TL-2** is a heavy duty, two-piece conveyor system that handles the rigorous environment often seen in the truck loading areas. The rugged 10" steel frame and the large 18" tires, coupled with its powerful 1.5HP drive system make the **TL-2** easy to use and long lasting, increasing operator productivity and reducing downtime. These factors along with one of the lowest overall cost make choosing the **TL-2** a **wise investment**.

FEATURES AND OPTIONS



Festoon System



Recessed Controls



Changeable Drive System



Fan and Light

Flexible Material Handling

SMART SOLUTIONS[™]

ALL STEEL CONSTRUCTION. THE STRONGEST CONVEYORS IN THE WORLD.

NESTAFLEX®

SMART DESIGNS COME FROM SMART SOLUTIONS.

SPECIFICATIONS


Model Number	EXT Length	Comp. Length	Upper BF	Lower BF
TL-230-35-31	60'	34'	35"	31"
TL-232-35-31	64'	36'	35"	31"
TL-228-32-28	56'	32'	32"	28"
TL-230-37-33	60'	34'	37"	33"
TL-230-40-36	60'	34'	40"	36"

NESTAFLEX
Aftersort

TL2 

HEAVY DUTY 2-STAGE
GRAVITY TRUCK LOADER

Example model lengths with a variety of configurations.
We can help you design the model that is the right fit for your application.

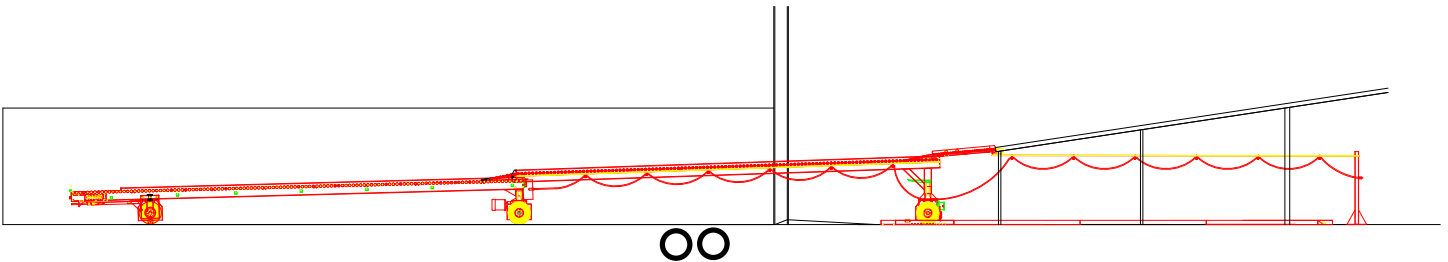

STANDARD FEATURES

- 10" Structural Steel Frame
- 18" Solid Rubber Tires
- 1.9" x 16 Gauge Galvanized Steel Rollers
- 60' Extended – 33' Compacted – Std. Model
- 33" Conveying Width
- 460VAC 3 Phase Power
- Carton Guides Full Length of Conveyor
- Manual Steering (5 Degrees L – R)
- 1.5 HP Drive

ADDITIONAL OPTIONS AND BENEFITS

- Light and Fan Kits
- 2" Roller Centers
- ABEC Sealed Precision Bearings
- 230VAC 3 Phase Power
- Herringbone Transition
- Operator Controls for Upstream Conveyors
- Other Widths and Lengths Available

Flexible Material Handling

SMART SOLUTIONS™