









Modular Transfer Plate Assemblies

Chain Guides
and Wear Strips




Assemblies with two modules



Assembly with two modules of three rows of rollers

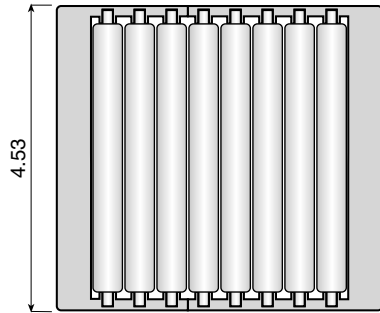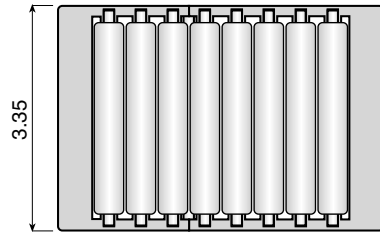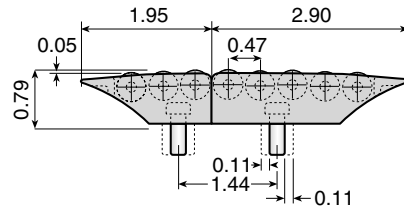


Assembly with two modules:
- One module with three rows of rollers
- One module with five rows of rollers

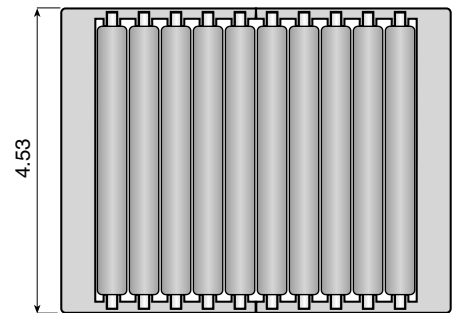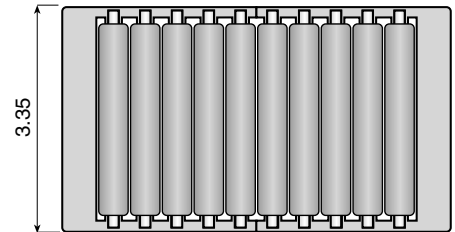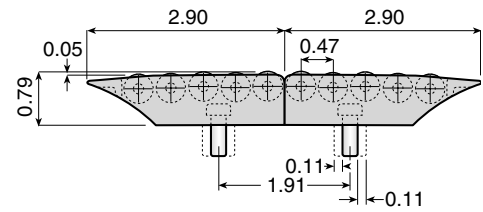


Assembly with two modules of five rows of rollers

Assemblies with head to tail transfers

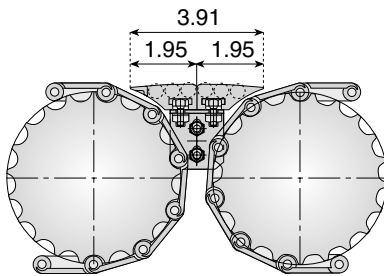


Head to tail transfer with two modules of three rows of rollers.

Assembly with stainless steel or plastic flat top chains. Top plate thickness from 0.12 inch. to 0.19 inch.

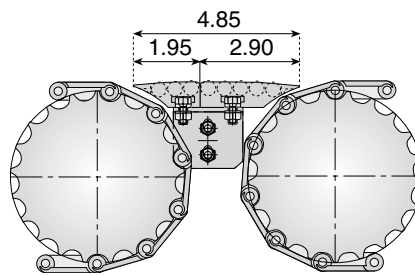

Head to tail transfer two with modules:
- One module of three rows of rollers
- One module of five rows of rollers

Assembly with stainless steel or plastic flat top chains. Top plate thickness from 0.12 inch. to 0.19 inch.

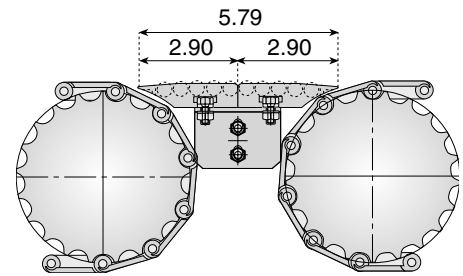

Head to tail transfer with two modules of five rows of rollers.

Assembly with stainless steel or plastic flat top chains. Top plate thickness from 0.12 inch. to 0.19 inch.