


# Plastic Rollers

## 1.18" Dia. x .075" Wall Thickness - 3/8" Round Shaft

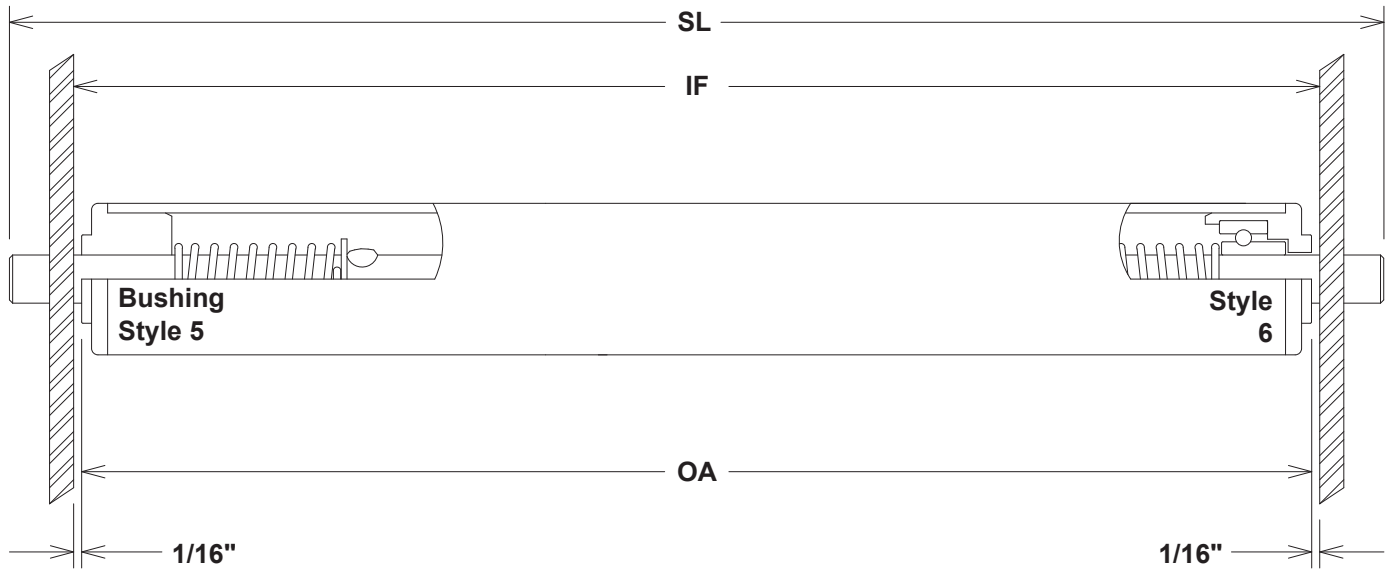

<b>Bearings:</b>	<b>Type:</b> Steel, Commercial Stainless Steel Bushing Style, UHMW Bushing Style, Acetal Bushing Style, Ultra	<b>Part #</b> 2K6 Inquire Inquire Inquire 5L9	<b>Style / Description:</b> 6 / Plastic Housing - No Seals 6 / Plastic Housing - No Seals 5 / UHMW Plastic 5 / Acetal Plastic 5 / "Ultra" Acetal Plastic
<b>Tube:</b>	<b>Materials:</b> PVC	<b>Part #</b> D17	<b>Description:</b> 1.18" x .075" Wall Gray PVC
<b>Shaft:</b>	<b>Materials:</b> Carbon Steel Stainless Steel	<b>Part #</b> C20 S25	<b>Description:</b> 3/8" Round Carbon Steel Shaft 3/8" Round 304 Stainless Steel Shaft
	Standard Extensions:	9/16"	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
	Options:	Fixed shaft, through shaft, D-shaft, threaded	

**Note:** Bushing style bearings are for intermittent use only.  
Not recommended for powered systems.

### Load Capacity (LBS.)

Frame I.F.	Bearing #		Frame I.F.	Bearing #	
	2K6	BUSHING		2K6	BUSHING
12	24	24	33	***	***
15	15	15	36	***	***
18	10	10	39	***	***
21	7	7	42	***	***
24	6	6	45	***	***
27	***	***	48	***	***
30	***	***	51	***	***

\* Longer lengths are not recommended exceeding a load capacity of 5 pounds.