


Plastic Rollers

1.31" Dia. x .133" Wall Thickness - 5/16" Hex Shaft

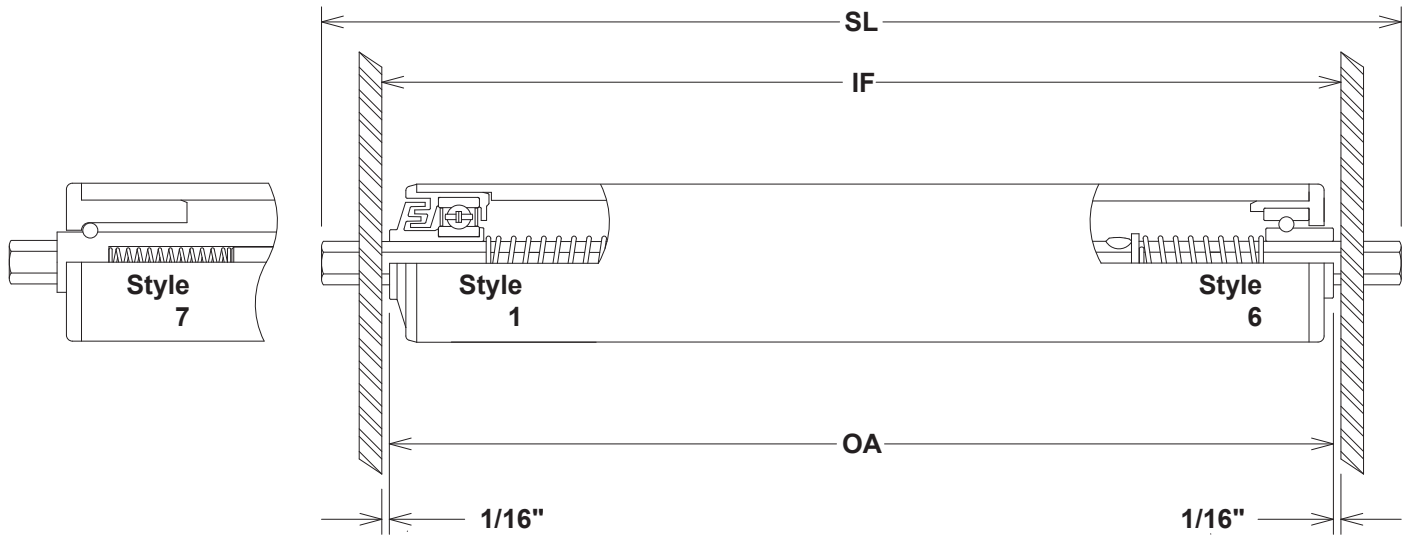

Bearings:	Type:	Part #	Style / Description:
	ABEC-1 Precision	3M6	1 / Conductive plastic - Double labyrinth seal construction
	Stainless Steel	1L4	7 / Stainless steel balls in a plastic housing and raceway
	Steel, Commercial	2L4	6 / Plastic housing - No seals
	Stainless Steel	2L0	6 / Plastic housing - No seals

Tube:	Materials:	Part #	Description:
	PVC	W20	1.31" x .133" Wall White PVC

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C14	5/16" Hex Carbon Steel Shaft
	Stainless Steel	S14	5/16" Hex 304 Stainless Steel Shaft
	Acetal Adapters	C12	5/16" Hex External Adapter with 1/4" Round Internal Carbon Steel Shaft
	Acetal Adapters	S12	5/16" Hex External Adapter with 1/4" Round Internal 304 Stainless Steel Shaft
	Standard Extensions:	7/16" with C12 and S12, 9/16" with C14 and S14	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
	Options:	Fixed shaft, through shaft, holes, pins or rings	

Note: 1L4 style bearings are for intermittent use only.
Not recommended for powered systems.

Load Capacity (LBS.)

Frame I.F.	Bearing #				Frame I.F.	Bearing #			
	3M6	2L4	1L4	2L0		3M6	2L4	1L4	2L0
12	40	37	10	37	33	***	***	***	***
15	24	23	10	23	36	***	***	***	***
18	16	16	10	16	39	***	***	***	***
21	12	11	10	11	42	***	***	***	***
24	9	9	9	9	45	***	***	***	***
27	7	7	7	7	48	***	***	***	***
30	***	***	***	***	51	***	***	***	***

* Longer lengths are not recommended exceeding a load capacity of 5 pounds.