


2.87" Dia. x .276" Wall Thickness - 7/16" Hex Shaft

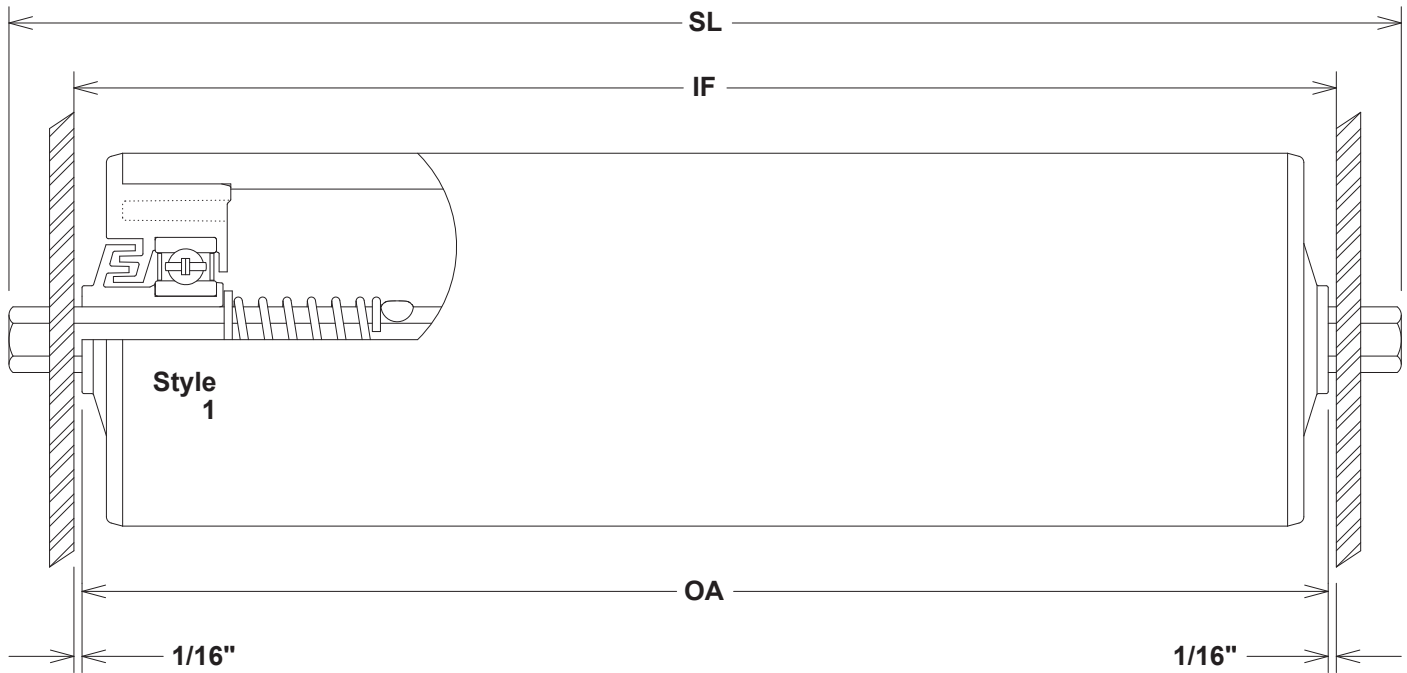

Bearings:	Type:	Part #	Style / Description:
	Steel, Commercial	2E8	1 / Plastic housing with double labyrinth seal construction
	Stainless Steel	2E9	1 / Plastic housing with double labyrinth seal construction
	ABEC-1 Precision	3D2	1 / Plastic housing with double labyrinth seal construction

Tube:	Materials:	Part #	Description:
	PVC	W65	2.87" x .276" Wall White PVC

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C68	7/16" Hex Carbon Steel Shaft
	Stainless steel	S70	7/16" Hex 304 Stainless Steel Shaft
	Aluminum	A66	7/16" Hex Aluminum Shaft
	Options:	Zinc Plated	

Standard Extensions: 9/16"

Standard Springs: Dual spring loaded with shaft depressing to bearing hub

Options: Fixed shaft, through shaft, holes, pins or rings, drilled and tapped, flat caps

Load Capacity (LBS.)

Frame I.F.	Bearing #			Frame I.F.	Bearing #		
	2E8	2E9	3D2		2E8	2E9	3D2
12	174	174	210	33	85	85	103
15	174	174	210	36	78	78	94
18	167	167	196	39	71	71	86
21	140	140	166	42	66	66	80
24	121	121	144	45	61	61	74
27	106	106	127	48	57	57	65
30	94	94	114	51	54	54	57

* Load capacity with aluminum shaft is 33% of steel capacity.

** Longer lengths are available upon request but are not recommended.