


Through Hole Idler Rollers (THI) - Standard Duty Bushings

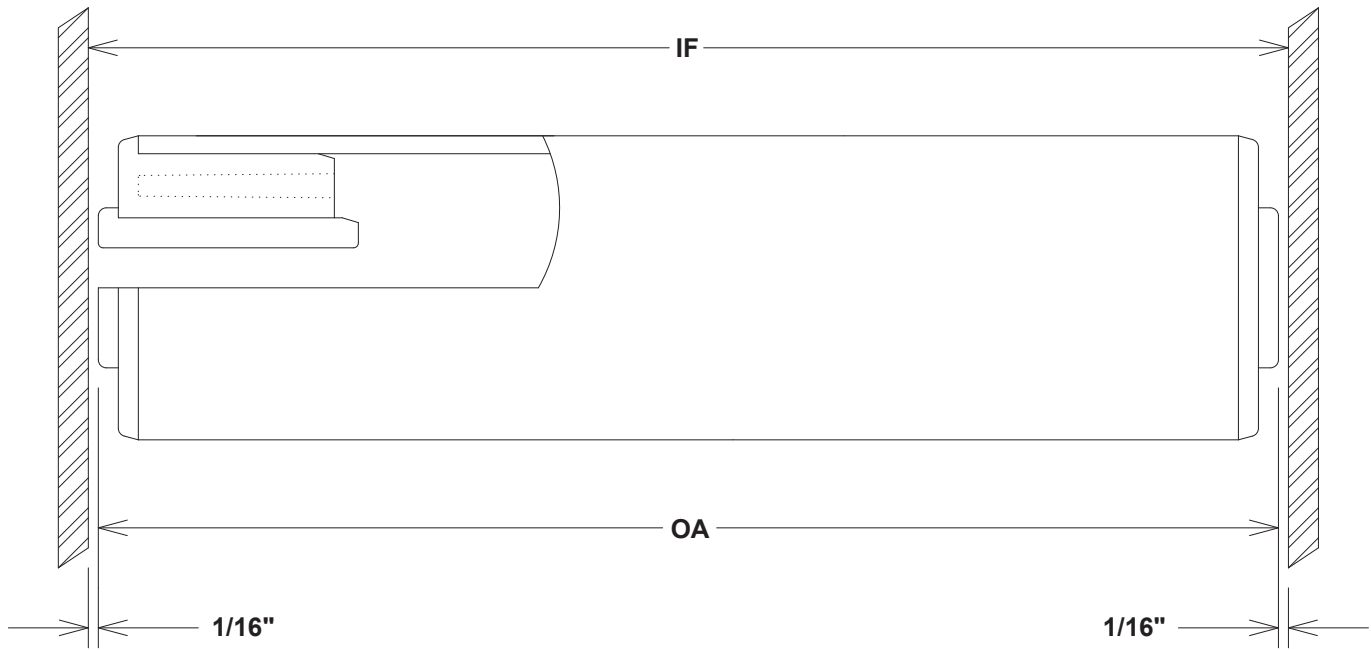

Tubes:

Tube No.	Tube O.D.	Wall Thickness
W00	0.840	0.107
W20	1.310	0.133
H41	1.900	0.112

Bushings:

Standard Duty
1/4T
5/16T
3/8T
7/16T
1/2T

Tube Materials:

W = White PVC
 H = "Hi-Impact" White PVC

Bushing Materials: FDA Approved

Molded Acetal unless otherwise specified

Options:

Molded "Ultra Blue" Acetal with Teflon additives
 UHMW (upon request)

Ordering Example:

Roller O.D. and wall thickness from tube chart _____
 Bushing size, type and duty from bushing chart _____
 Roller Style _____
 Length of Roller _____ **41 - 1/2T - THI X 24" OA**

O.A. = length of roller from outside to outside of plastic bushing
 I.F. = Inside frame dimension (will allow 1/8" endplay when roller is installed)
 * Note: Minimum I.F. should be O.A. + 1/8"