


**Blind Hole Idler Rollers (BHI) - Standard Duty Bushings**

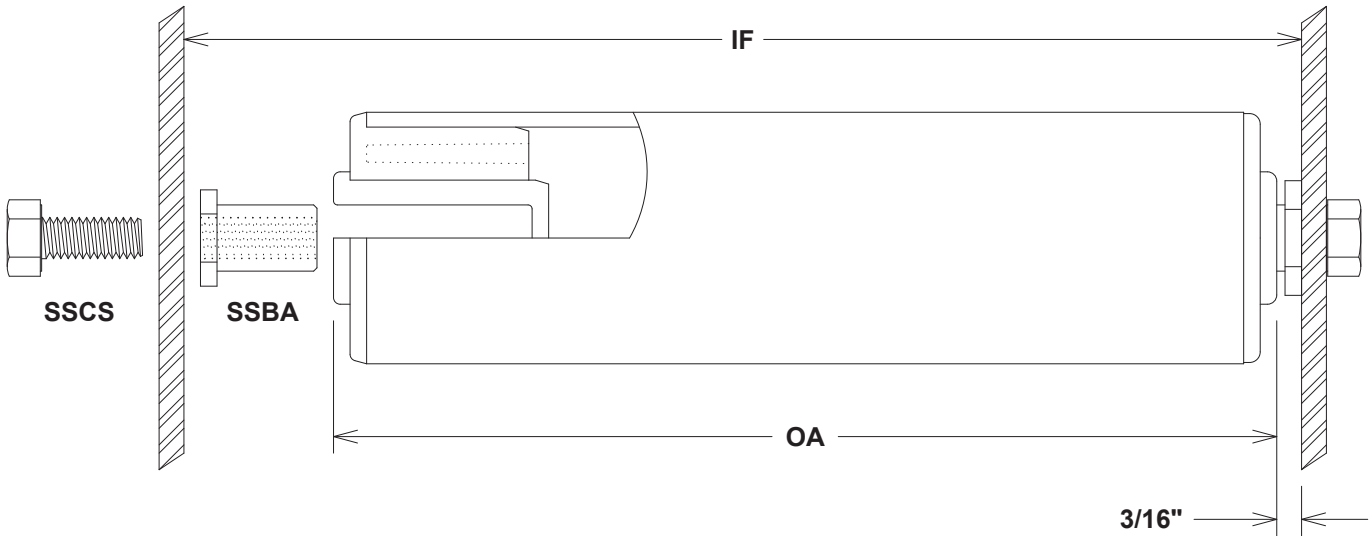

**Tubes:**

Tube No.	Tube O.D.	Wall Thickness
W20	1.310	0.133
H41	1.900	0.112

**Bushings:**

Standard Duty
3/8B
1/2B

**Tube Materials:**

W = White PVC  
H = "Hi-Impact" White PVC

**Bushing Materials: FDA approved**

Molded Acetal unless otherwise specified

**Options:**

Molded "Ultra Blue" Acetal with Teflon additives  
UHMW (upon request)

**Hardware:**

Frame hardware available for 1/2 B only consisting of; 2 each SSBA and 2 each SSCS  
SSBA = Stainless steel bushing adapter drilled and tapped 5/16" - 18  
SSCS = Stainless steel cap screw threaded 5/16" - 18

**Ordering example:**

41 - 1/2B - BHI X 24" IF with hardware

Roller O.D. and wall thickness from tube chart \_\_\_\_\_  
Bushing size, type and duty from bushing chart \_\_\_\_\_  
Roller Style \_\_\_\_\_  
Length of Roller \_\_\_\_\_

O.A. = Length of roller from outside to outside of plastic bushing

I.F. = Inside frame dimension (will allow 1/8" endplay when installed). Minimum I.F. dimension should be 3/8" greater than the O.A. so that the idler will fit in with the hardware and allow 1/8" endplay