


Blind Hole Idler Rollers (BHI) - Heavy Duty Bushings - GIR

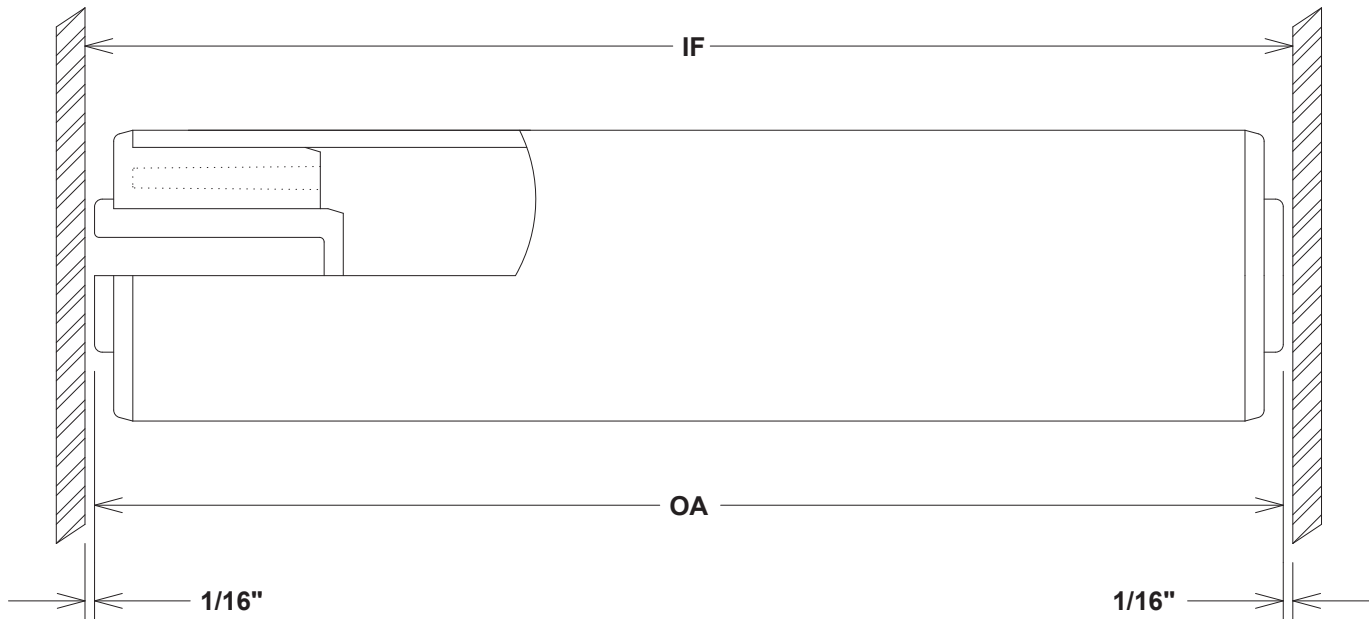

Tubes:

Tube No.	Tube O.D.	Wall Thickness
W10	1.050	0.113
W20	1.310	0.133
W30	1.660	0.140
H41	1.900	0.112
H45 / D45	1.900	0.200
H51	2.375	0.125
W55	2.375	0.218
H61	2.875	0.150
W65	2.875	0.276
D75	3.500	0.300
D85	4.500	0.337

Bushings:

Heavy Duty
7/16 5B GIR
1/2 5B GIR
9/16 5B GIR
5/8 5B GIR
3/4 5B GIR

5 = Heavy duty bushing
 B = Blind hole style bushing
 GIR = Grading and Inspection - 1 13/16" long

Tube Materials:

W = White PVC
 H = "Hi-Impact" White PVC
 D = Dark Gray PVC

Bushing Materials: FDA Approved

Molded Acetal unless otherwise specified

Hardware:

Not available

Options:

Molded "Ultra Blue" Acetal with Teflon additives
 UHMW (upon request)

Ordering example:

Roller O.D. and wall thickness from tube chart _____
 Bushing size, type and duty from bushing chart _____
 Roller Style _____
 Length of Roller _____

51 - 1/2 5B GIR X 24" OA

O.A. = Length of roller from outside to outside of plastic bushing
 I.F. = Inside frame dimension (will allow 1/8" endplay when roller is installed).
 * Note: Minimum IF should be OA + 1/8"