


1.12" Dia. x .065" Wall Thickness - 5/16" Hex Shaft

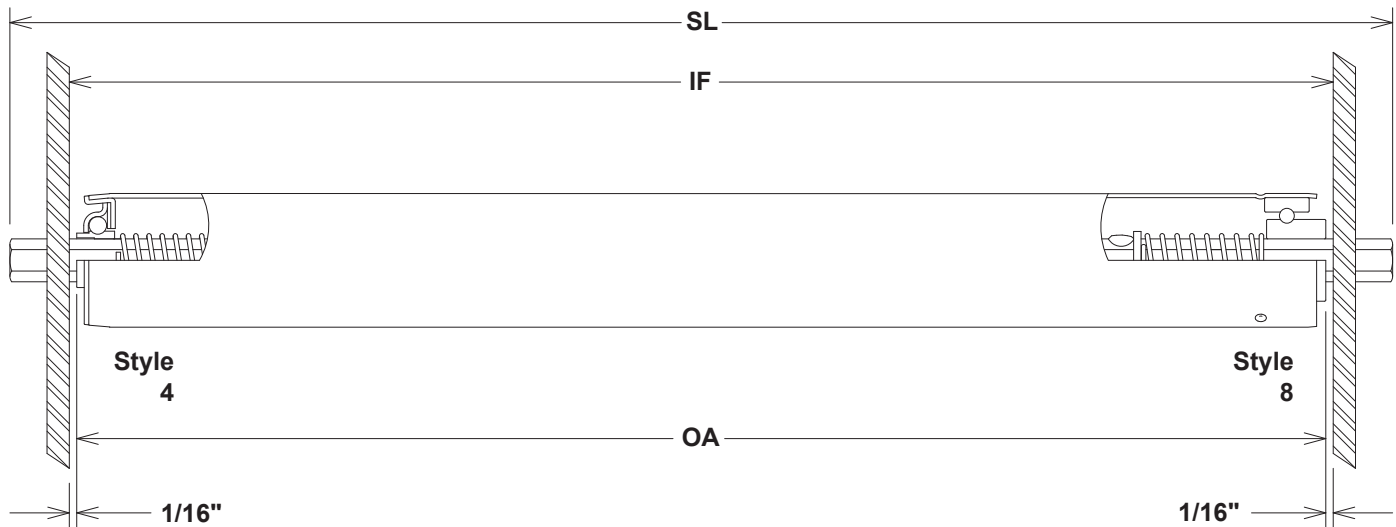

Bearings:	Type: Stamped Commercial Steel, Commercial Stainless Steel	Part # Inquire 2K7 Inquire	Style / Description: 4 / Stamped zinc plated commercial 8 / Bearing mounted directly into tube - No Seals 8 / Bearing mounted directly into tube - No Seals
Tube:	Materials: Carbon Steel Galvanized Steel	Part # C16 G16	Description: 1.12" x .065" Wall Carbon Steel 1.12" x .065" Wall Galvanized Steel
	Options:		Stainless steel and aluminum available in .035" and .049" wall thickness upon inquiry.
	Cover Options:		Urethane Sleeves, Urethane Tapered Rollers, HDPE
	Finish Options:		Polished, Anodized, Electroplished, Passivated
Shaft:	Materials: Carbon Steel Stainless Steel	Part # C14 S14	Description: 5/16" Hex Carbon Steel Shaft 5/16" Hex 304 Stainless Steel Shaft
	Standard Extensions:	9/16"	
	Standard Springs:		Dual spring loaded with shaft depressing to bearing hub
	Options:		Fixed shaft, through shaft, holes

Load Capacity (LBS.)

Frame I.F.	Bearing # 2K7	Frame I.F.	Bearing # 2K7
12	60	33	60
15	60	36	60
18	60	39	60
21	60	42	60
24	60	45	60
27	60	48	60
30	60	51	60

* Longer lengths are available upon request.

** Capacities are for uniform loading - Reduce by 50% for point loading.