


## 1.18" Dia. x .055" Wall Thickness - 1/4" Round Shaft

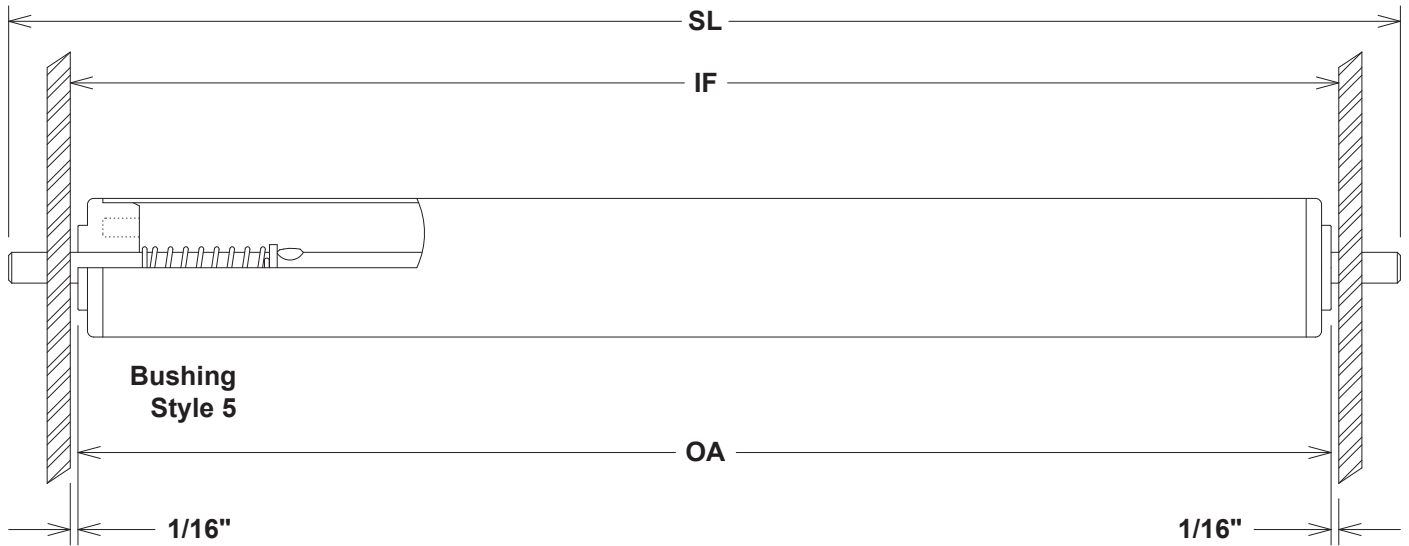

<b>Bearings:</b>	<b>Type:</b> Bushing Style, UHMW Bushing Style, Acetal Bushing Style, Ultra	<b>Part #</b> Inquire Inquire 5F2	<b>Style / Description:</b> 5 / UHMW Plastic 5 / Acetal Plastic 5 / Ultra Acetal Plastic
<b>Tube:</b>	<b>Materials:</b> Aluminum	<b>Part #</b> A14	<b>Description:</b> 1.18" x .055" Wall Aluminum - Clear Anodized
<b>Shaft:</b>	<b>Materials:</b> Carbon Steel Stainless Steel Aluminum	<b>Part #</b> C10 S10 A10	<b>Description:</b> 1/4" Round Carbon Steel Shaft 1/4" Round 304 Stainless Steel Shaft 1/4" Round Aluminum Shaft
	Standard Extensions:	9/16"	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
	Options:	Fixed shaft, through shaft, D-shaft, threaded	

**Note:** Bushing style bearings are for intermittent use only.  
Not recommended for powered systems.

### Load Capacity (LBS.)

Frame I.F.	BUSHING	Frame I.F.	BUSHING
12	60	33	24
15	54	36	***
18	44	39	***
21	38	42	***
24	33	45	***
27	29	48	***
30	26	51	***

\* Longer lengths are not recommended.

\*\* Capacities are for uniform loading - Reduce by 50% for point loading.