


1.37" Dia. x .049" Wall Thickness - 1/4" Round Shaft

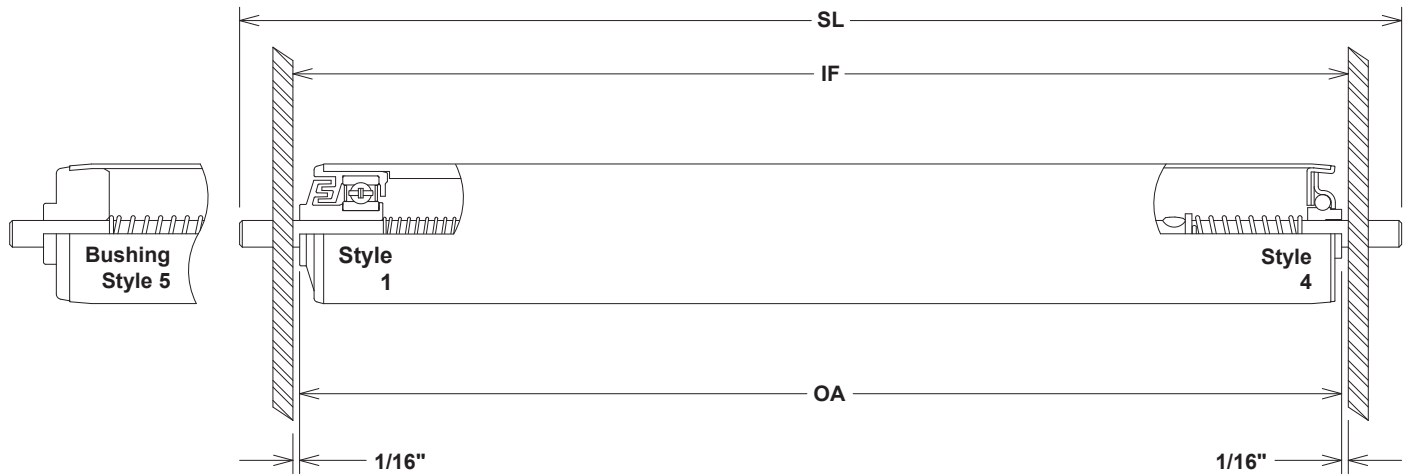

Bearings:	Type:	Part #	Style / Description:
	Stamped Commercial	22M2	4 / Stamped Zinc Plated Steel
	Stainless Steel	Inquire	1 / Conductive plastic - Double labyrinth seal construction
	Bushing Style, Ultra	5G5	5 / Non conductive Ultra
	ABEC-1 Precision	3N2	1 / Conductive Plastic Housing

Tube:	Materials:	Part #	Description:
	Carbon Steel	C25	1.37" x .049" Wall Carbon Steel
	Galvanized Steel	G25	1.37" x .049" Wall Galvanized Steel
	Stainless Steel	S27	1.37" x .049" Wall 304 Stainless Steel
	Aluminum	A25	1.37" x .049" Wall Aluminum

Options: .065" Wall Thickness Available Upon Request
 Drive Options: Sprockets
 Cover Options: Urethane Sleeves, Urethane Tapered Rollers, HDPE
 Finish Options: Electropolished, Passivated, Polished, Anodized

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C10	1/4" Round Carbon Steel Shaft
	Stainless Steel	S10	1/4" Round 304 Stainless Steel Shaft
	Aluminum	A10	1/4" Round Aluminum Shaft

Standard Extensions: 9/16"
 Standard Springs: Dual spring loaded with shaft depressing to bearing hub
 Options: Fixed shaft, through shaft, threaded, D-shaft

Note: Bushing style bearings are for intermittent use only.
 Not recommended for powered systems

Load Capacity (LBS.)

Frame	Bearing #			Frame	Bearing #			
	I.F.	3N2	22M2		5G5	I.F.	3N2	22M2
12	94	90	60	33	18	32	32	
15	59	72	60	36	***	***	***	
18	43	59	59	39	***	***	***	
21	34	51	51	42	***	***	***	
24	28	44	44	45	***	***	***	
27	24	39	39	48	***	***	***	
30	21	35	35	51	***	***	***	

* Reduce capacity by 33% for aluminum tube or shaft.

** Longer lengths are available upon request.

*** Capacities are for uniform loading only - Reduce by 50% for point loading