


Metal Rollers

1.37" Dia. x .049" Wall Thickness - 5/16" Hex Shaft

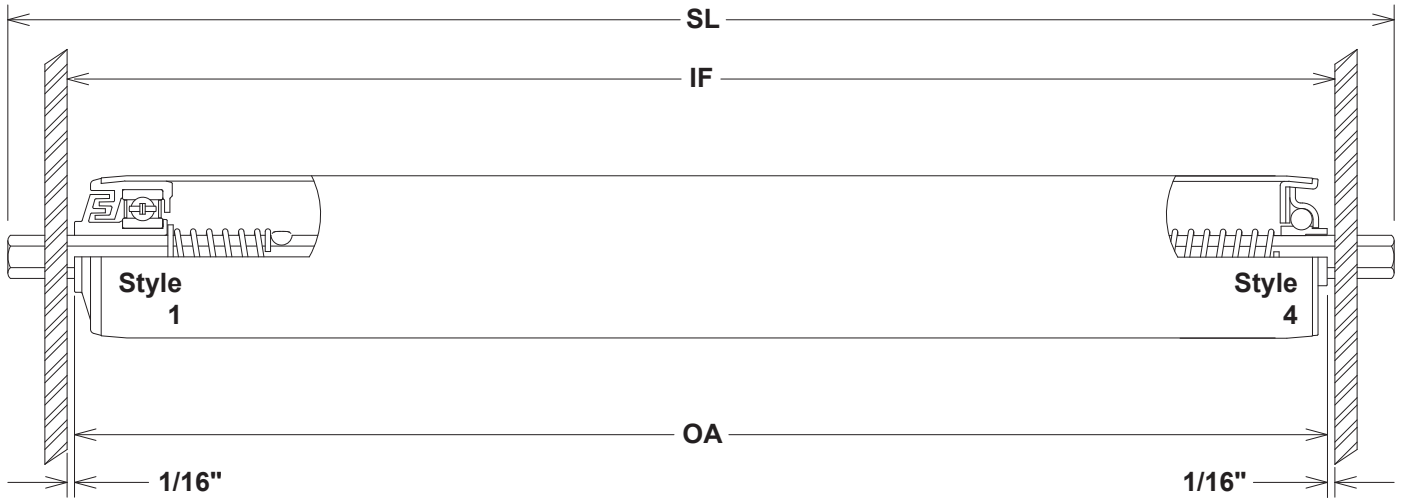

Bearings:	Type: ABEC-1 Precision Stamped Commercial Stainless Steel	Part # 3M3 22M4 Inquire	Style / Description: 1 / Conductive plastic - Double labyrinth seal construction 4 / Stamped zinc plated steel 1 / Conductive plastic - Double labyrinth seal construction
------------------	---	---	--

Tube:	Materials: Carbon Steel Galvanized Steel Stainless Steel Aluminum	Part # C25 G25 S27 A25	Description: 1.37" x .049" Wall Carbon Steel 1.37" x .049" Wall Galvanized Steel 1.37" x .049" Wall 304 Stainless Steel 1.37" x .049" Wall Aluminum
--------------	--	---	--

Drive Options: Sprockets
 Cover Options: Urethane Sleeves, Urethane Tapered Rollers, HDPE
 Finish Options: Electropolished, Passivated, Polished, Anodized

Shaft:	Materials: Carbon Steel Stainless Steel	Part # C14 S14	Description: 5/16" Hex Carbon Steel Shaft 5/16" Hex 304 Stainless Steel Shaft
---------------	--	-----------------------------	--

Standard Extensions: 9/16"
 Standard Springs: Dual spring loaded with shaft depressing to bearing hub
 Options: Fixed shaft, through shaft, holes

Load Capacity (LBS.)

Frame	Bearing #		Frame	Bearing #	
I.F.	3M3	22M4	I.F.	3M3	22M4
12	100	94	33	34	87
15	79	94	36	31	80
18	65	94	39	29	74
21	55	94	42	27	68
24	48	94	45	25	64
27	42	94	48	23	60
30	38	94	51	22	56

* Load capacity with aluminum tube is 33% of steel capacity.

** Longer lengths are available upon request.

*** Capacities are for uniform loading - Reduce 50% for point loading.