


## 1.51" Dia. x .065" Wall Thickness - 5/16" Hex Shaft

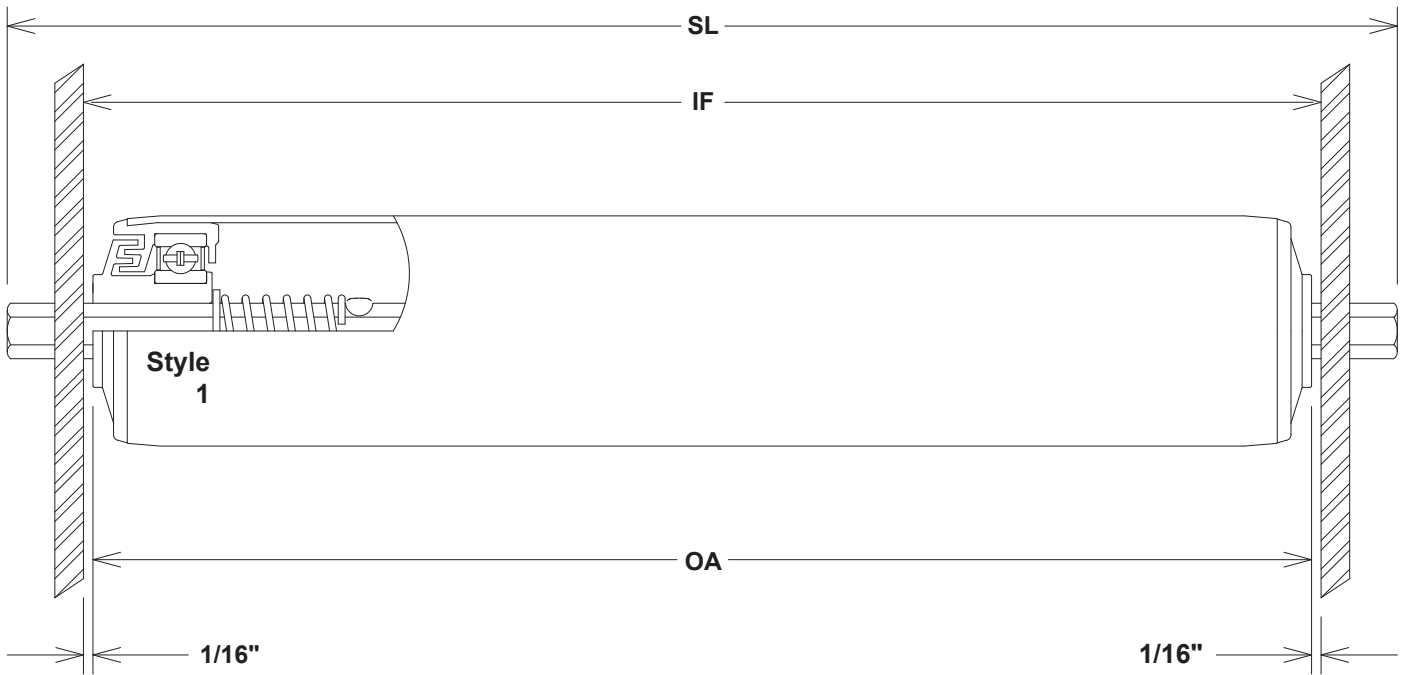

<b>Bearings:</b>	<b>Type:</b>	<b>Part #</b>	<b>Style / Description:</b>
	ABEC-1 Precision	3H3	1 / Conductive plastic - Double labyrinth seal construction
	Stainless Steel	2V5	1 / Conductive plastic - Double labyrinth seal construction
	Steel, Commercial	2P5	1 / Conductive plastic - Double labyrinth seal construction

<b>Tube:</b>	<b>Materials:</b>	<b>Part #</b>	<b>Description:</b>
	Galvanized Steel	G29	1.51" x .065" Wall Galvanized Steel
	Drive Options:	Grooves, Sprockets, One Way Clutch	
	Cover Options:	Urethane Sleeves, Urethane Tapered Rollers, HDPE	

<b>Shaft:</b>	<b>Materials:</b>	<b>Part #</b>	<b>Description:</b>
	Carbon Steel	C14	5/16" Hex Carbon Steel Shaft
	Stainless Steel	S14	5/16" Hex 304 Stainless Steel Shaft
	Standard Extensions:	9/16"	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
	Options:	Fixed shaft, through shaft, holes	

### Load Capacity (LBS.)

Frame I.F.	Bearing #			Frame I.F.	Bearing #		
	3H3	2V5	2P5		3H3	2V5	2P5
12	100	120	120	33	34	46	46
15	79	105	105	36	31	42	42
18	65	86	86	39	29	38	38
21	55	73	73	42	27	36	36
24	48	64	64	45	25	33	33
27	42	56	56	48	23	31	31
30	38	50	50	51	22	29	29

\* Longer lengths are available upon request.