


Metal Rollers

1.51" Dia. x .065" Wall Thickness - 7/16" Hex Shaft

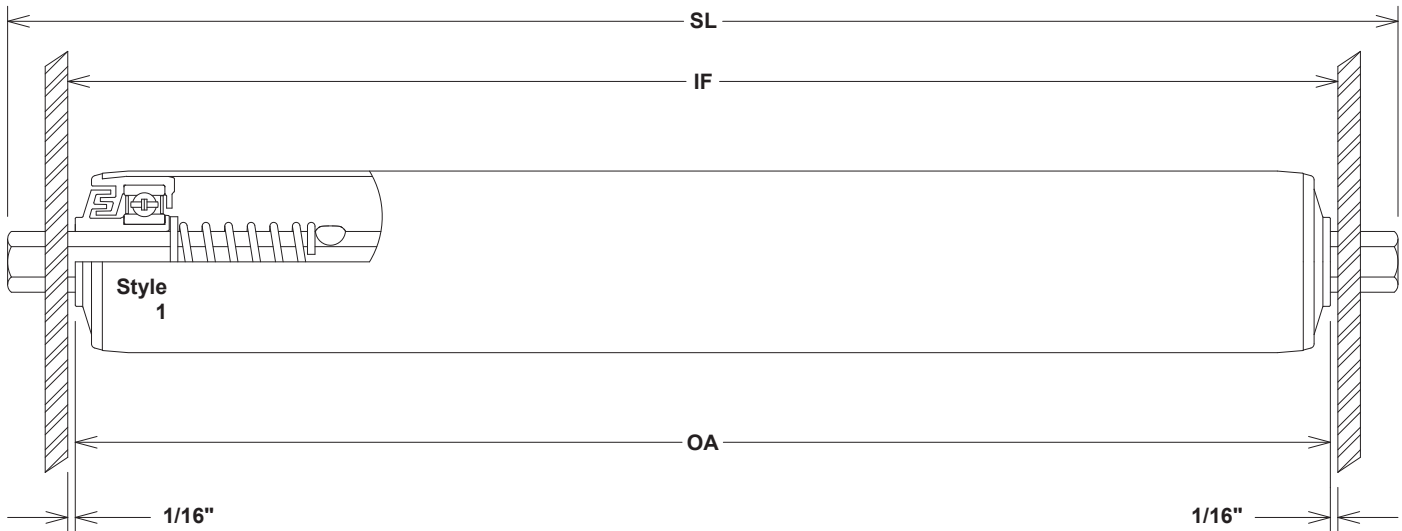

Bearings:	Type: ABEC-1 Precision Stainless Steel Steel, Commercial	Part # 3A8 2O5 2P7	Style / Description: 1 / Conductive plastic - Double labyrinth seal construction 1 / Conductive plastic - Double labyrinth seal construction 1 / Conductive plastic - Double labyrinth seal construction
Tube:	Materials: Galvanized Steel	Part # G29	Description: 1.51" x .065" Wall Galvanized Steel
	Drive Options: Cover Options:	Grooves, Sprockets, One Way Clutch Urethane Sleeves, Urethane Tapered Rollers, HDPE	
Shaft:	Materials: Carbon Steel Stainless Steel Aluminum Options: ** Plastic Adapters *** Urethane Adapters ** Plastic Adapters *** Urethane Adapters	Part # C68 S70 A66 Zinc Plated C62 UC62 S62 US62	Description: 7/16" Hex Carbon Steel Shaft 7/16" Hex 304 Stainless Steel Shaft 7/16" Hex Aluminum Shaft 7/16" Hex External Adapter with 5/16" Hex Internal Carbon Steel Shaft 7/16" Hex External Adapter with 5/16" Hex Internal Carbon Steel Shaft 7/16" Hex External Adapter with 5/16" Hex Internal 304 Stainless Steel Shaft 7/16" Hex External Adapter with 5/16" Hex Internal 304 Stainless Steel Shaft
	** Max 50 Lbs Per Roller *** Max 100 Lbs Per Roller Standard Extensions: Standard Springs: Options:	1/2" - 9/16" with adapters, 9/16" all others Dual spring loaded with shaft depressing to bearing hub Fixed shaft, through shaft, holes, drilled and tapped	

Load Capacity (LBS.)

Frame	Bearing #			Frame	Bearing #			
	I.F.	3A8	2O5		2P7	I.F.	3A8	2O5
12		190	120	120	33	125	116	116
15		190	120	120	36	115	106	106
18		190	120	120	39	106	98	98
21		190	120	120	42	98	90	90
24		175	120	120	45	91	84	84
27		155	120	120	48	85	79	79
30		139	120	120	51	80	74	74

* Load capacity with aluminum shaft is 33% of steel capacity.

** Longer lengths are available upon request.