


Metal Rollers

1.90" Dia. x .065" Wall Thickness - 1/4" Round Shaft

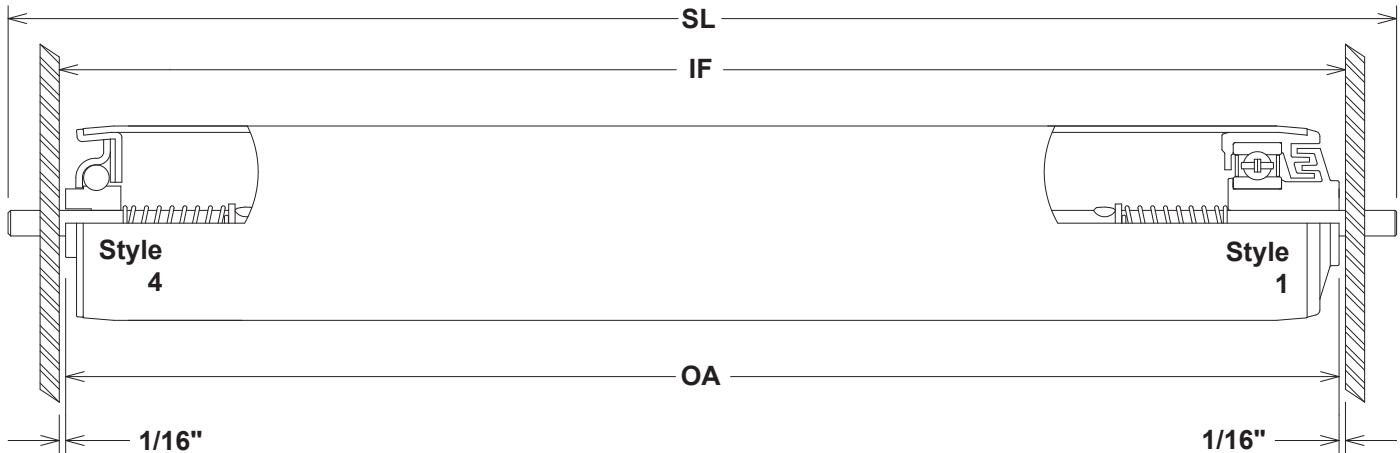

Bearings:	Type:	Part #	Style / Description:
	ABEC-1 Precision	Inquire	1 / Conductive plastic - Double labyrinth seal construction
	Steel, Commercial	2C4	1 / Conductive plastic - Double labyrinth seal construction
	Stainless Steel	2C2	1 / Conductive plastic - Double labyrinth seal construction
	Stamped Commercial	22C4	4 / Stamped zinc plated steel

Tube:	Materials:	Part #	Description:
	Carbon Steel	C46	1.90" x .065" Wall Carbon Steel
	Galvanized Steel	G46	1.90" x .065" Wall Galvanized Steel
	Stainless Steel	S46	1.90" x .065" Wall 304 Stainless Steel
	Aluminum	A46	1.90" x .065" Wall Aluminum

Drive Options: Grooves, Sprockets
Cover Options: Urethane Sleeves, Urethane Tapered Rollers, HDPE
Finish Options: Electropolished, Passivated, Polished, Anodized

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C10	1/4" Round Carbon Steel Shaft
	Stainless Steel	S10	1/4" Round 304 Stainless Steel Shaft
	Aluminum	A10	1/4" Round Aluminum Shaft
	Standard Extensions:	9/16"	
	Standard Springs:		Dual spring loaded with shaft depressing to bearing hub
Options:		Fixed shaft, through shaft, threaded (1/4 x 20), D-shaft	

Load Capacity (LBS.)

Frame	Bearing #		Frame	Bearing #	
	I.F.			I.F.	
12	2C4	2C2	33	2C4	2C2
12	41	41	33	14	14
15	32	32	36	13	13
18	26	26	39	12	12
21	22	22	42	11	11
24	19	19	45	10	10
27	17	17	48	9	9
30	15	15	51	9	9

* Load capacity with aluminum tube or shaft is 33% of steel capacity.

** Longer lengths are available upon request.

*** Capacities are for uniform loading - Reduce 50% for point loading