


1.90" Dia. x .065" Wall Thickness - 1/2" Round Shaft

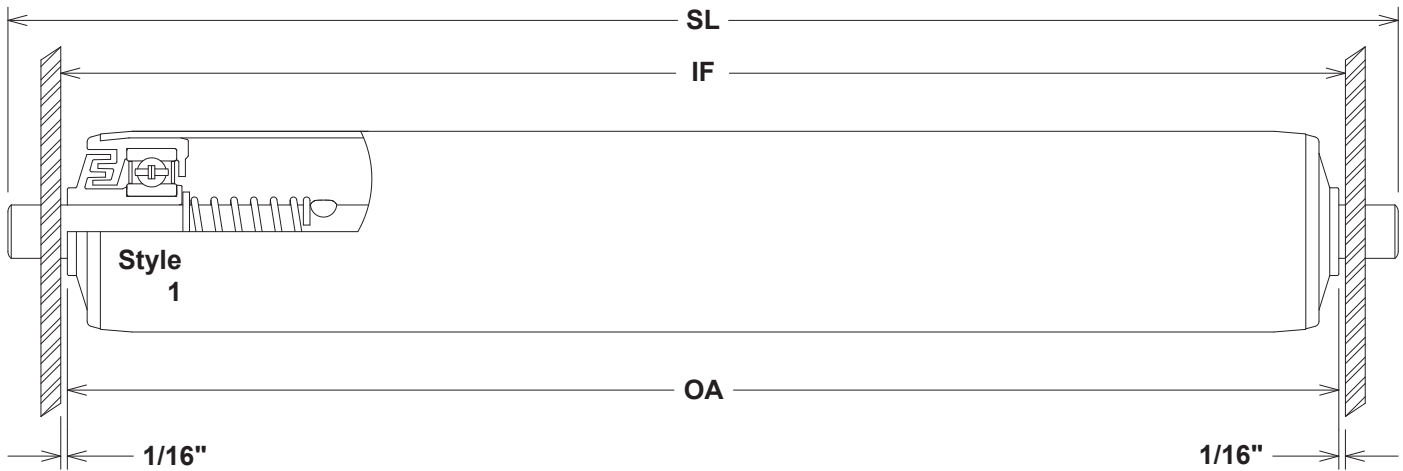

Bearings:	Type:	Part #	Style / Description:
	ABEC-1 Precision	3A2	1 / Conductive plastic - Double labyrinth seal construction
	Steel, Commercial	2E1	1 / Conductive plastic - Double labyrinth seal construction
	Stainless Steel	2C3	1 / Conductive plastic - Double labyrinth seal construction

Tube:	Materials:	Part #	Description:
	Carbon Steel	C46	1.90" x .065" Wall Carbon Steel
	Galvanized Steel	G46	1.90" x .065" Wall Galvanized Steel
	Stainless Steel	S46	1.90" x .065" Wall 304 Stainless Steel
	Aluminum	A46	1.90" x .065" Wall Aluminum

Drive Options: Grooves, Sprockets
Cover Options: Urethane Sleeves, Urethane Tapered Rollers, HDPE
Finish Options: Electropolished, Passivated, Polished, Anodized

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C30	1/2" Round Carbon Steel Shaft
	Stainless Steel	S35	1/2" Round 304 Stainless Steel Shaft
	Options:	Zinc Plated	
	Standard Extensions:	9/16"	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
Options:	Fixed shaft, through shaft, holes, threaded, drilled and tapped, milled flats, D-Shaft		

Load Capacity (LBS.)

Frame I.F.	Bearing #			Frame I.F.	Bearing #		
	3A2	2E1	2C3		3A2	2E1	2C3
12	368	174	174	33	125	95	95
15	289	174	174	36	115	87	87
18	237	174	174	39	106	80	80
21	201	156	156	42	98	74	74
24	175	134	134	45	91	69	69
27	155	118	118	48	85	64	64
30	139	105	105	51	80	60	60

* Load capacity with aluminum tube is 33% of steel capacity.

** Longer lengths are available upon request.

*** Capacities are for uniform loading - Reduce 50% for point loading