


## 3.00" Dia. x .120" Wall Thickness - 11/16" Hex Shaft

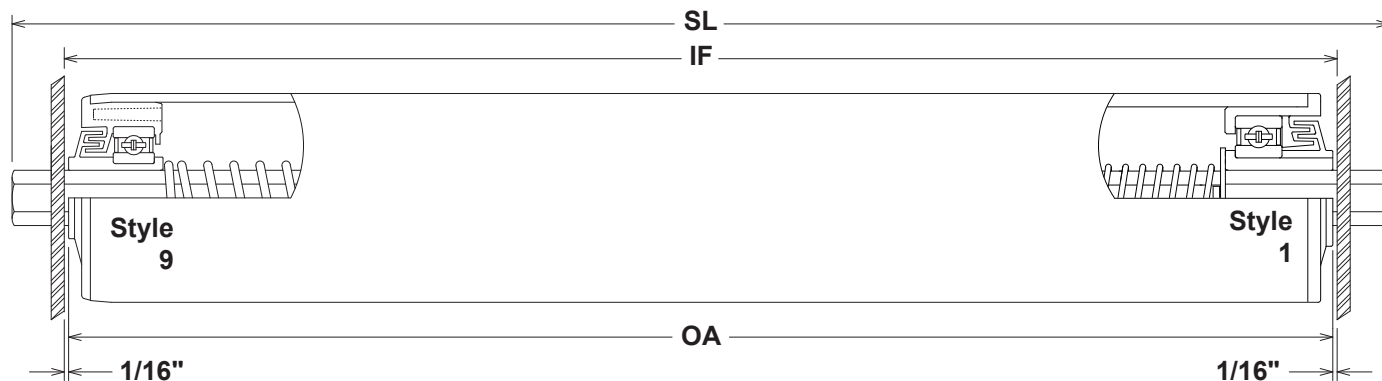

<b>Bearings:</b>	<b>Type:</b>	<b>Part #</b>	<b>Style / Description:</b>
	ABEC-1 Precision	3K4	1 / Conductive plastic - Double labyrinth seal construction
	ABEC-1 Precision	34K4	9 / ABEC-1 precision bearing in a fully machined metal housing with plastic double labyrinth seals. For heavy duty applications.
	Stainless Steel	Inquire	1 / Conductive plastic - Double labyrinth seal construction
<b>Tube:</b>	<b>Materials:</b>	<b>Part #</b>	<b>Description:</b>
	Carbon Steel	C79	3.00" x .120" Wall Carbon Steel
	Galvanized Steel	Inquire	3.00" x .120" Wall Galvanized Steel
	Stainless Steel	Inquire	3.00" x .120" Wall 304 Stainless Steel
	Drive Options:	Sprockets	
	Cover Options:	Urethane Sleeves	
	Finish Options:	Polished, Electropolished, Passivated, Zinc Plated	
<b>Shaft:</b>	<b>Materials:</b>	<b>Part #</b>	<b>Description:</b>
	Carbon Steel	C82	11/16" Hex Carbon Steel Shaft
	Stainless Steel	S82	11/16" Hex 304 Stainless Steel Shaft
	Standard Extensions:	9/16"	
	Standard Springs:	Dual spring loaded with shaft depressing to bearing hub	
	Options:	Fixed shaft, through shaft, holes, drilled and tapped, zinc plated	

### Load Capacity (LBS.)

Frame I.F.	Bearing #		Frame I.F.	Bearing #	
	3K4	34K4		3K4	34K4
12	400	1350	33	282	793
15	400	1350	36	257	726
18	400	1350	39	236	669
21	400	1263	42	218	620
24	399	1100	45	203	578
27	350	975	48	190	541
30	312	875	51	178	509

Longer lengths are available upon request.  
Capacities are for uniform loading - Reduce 50% for point loading.