


## 3.50" Dia. x .083" Wall Thickness - 11/16" Hex Shaft

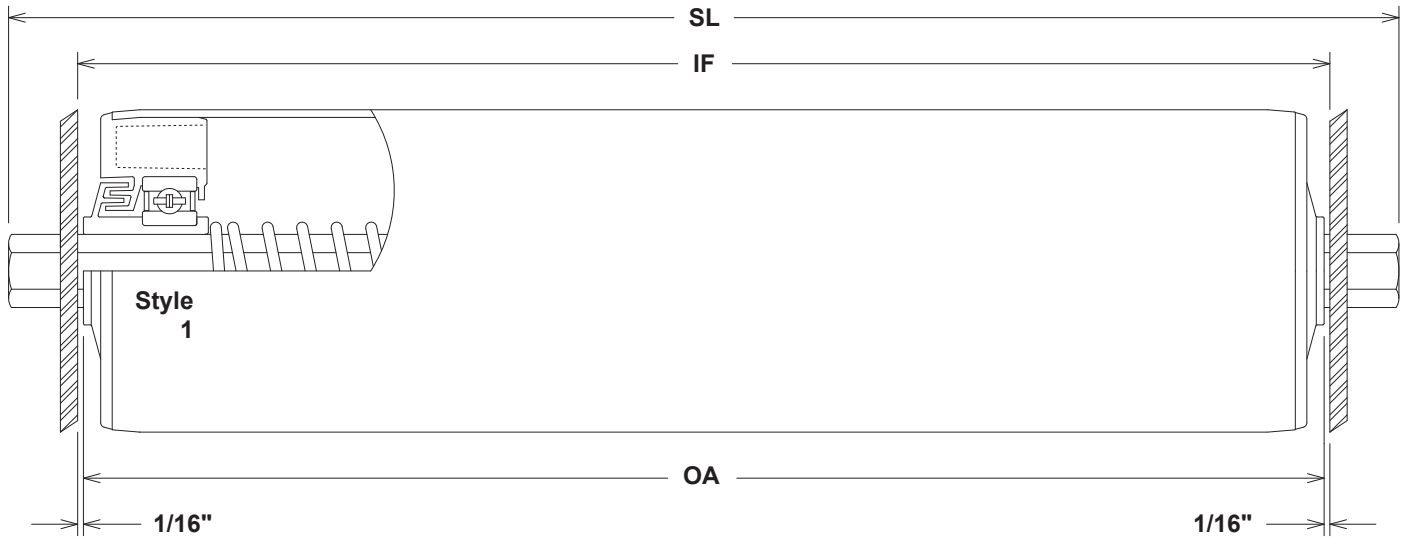

<b>Bearings:</b>	<b>Type:</b> ABEC-1 Precision	<b>Part #</b> 3E6	<b>Style / Description:</b> 1 / Conductive plastic - Double labyrinth seal construction
<b>Tube:</b>	<b>Materials:</b> Carbon Steel Stainless Steel	<b>Part #</b> C71 S71	<b>Description:</b> 3.50" x .083" Wall Carbon Steel 3.50" x .083" Wall 304 Stainless Steel
	Drive Options:	Grooves, Sprockets	
	Cover Options:	Urethane Sleeves	
	Finish Options:	Polished, Electropolished, Passivated, Zinc Plated	
<b>Shaft:</b>	<b>Materials:</b> Carbon Steel Stainless Steel	<b>Part #</b> C82 S82	<b>Description:</b> 11/16" Hex Carbon Steel Shaft 11/16" Hex 304 Stainless Steel Shaft
	Options:	Zinc Plated	
	Standard Extensions:	3/4"	
	Standard Springs:	Single spring loaded with shaft depressing to bearing hub	
	Optional Springs:	Dual spring loaded with grooves or sprockets	
	Options:	Fixed shaft, through shaft, holes, drilled and tapped	

### Load Capacity (LBS.)

Frame I.F.	Bearing # 3E6	Frame I.F.	Bearing # 3E6
12	400	33	400
15	400	36	374
18	400	39	344
21	400	42	318
24	400	45	296
27	400	48	276
30	400	51	259

\* Longer lengths are available upon request.

\*\* Capacities are for uniform loading - Reduce 50% for point loading.