


1.18" Dia. x .075" Wall Thickness - 3/16" Round Shaft

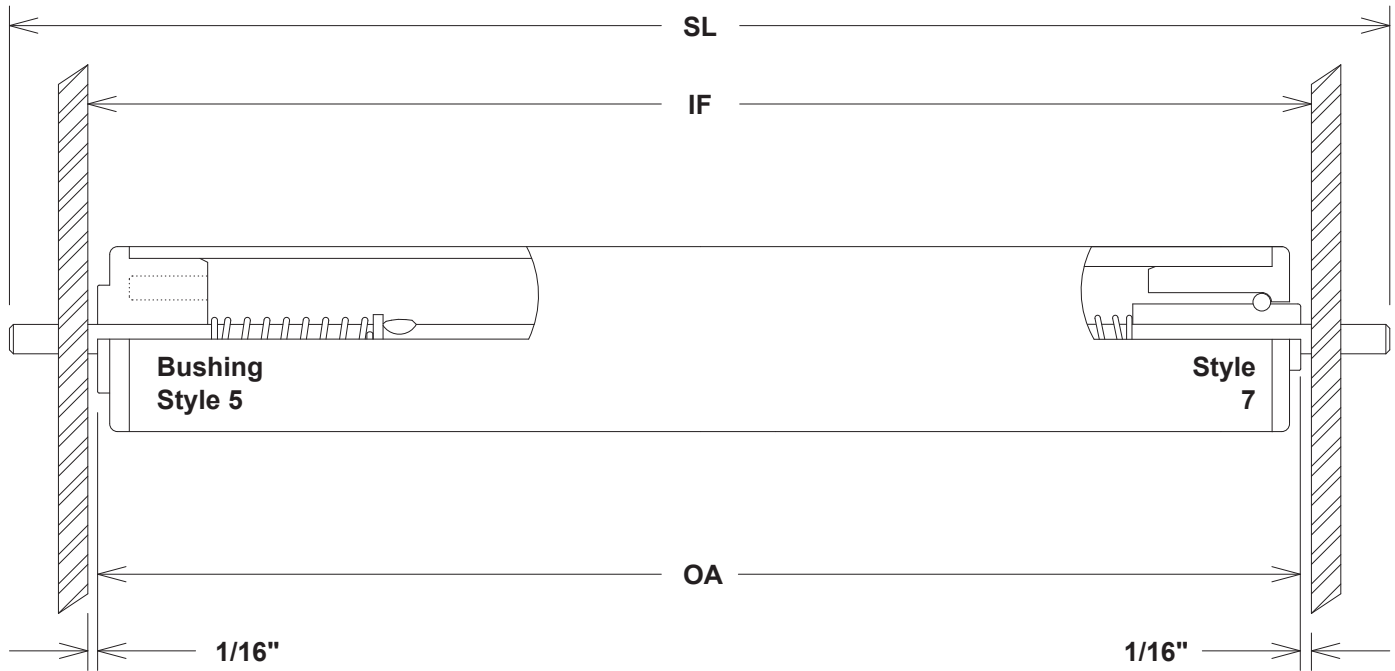

Bearings:	Type:	Part #	Style / Description:
	Stainless Steel	1L8	7 / Stainless steel balls in a plastic housing and raceway
	Bushing Style, UHMW	Inquire	5 / UHMW Plastic
	Bushing Style, Acetal	5D1	5 / Acetal Plastic
	Bushing Style, Ultra	Inquire	5 / "Ultra" Acetal Plastic

Tube:	Materials:	Part #	Description:
	PVC	D17	1.18" x .075" Wall White PVC

Shaft:	Materials:	Part #	Description:
	Carbon Steel	C08	3/16" Round Carbon Steel Shaft

Standard Extensions: 9/16"
 Standard Springs: Dual spring loaded with shaft depressing to bearing hub
 Options: Fixed shaft, through shaft, D-shaft

Note: Bushing style rollers are for intermittent use only.
 Not recommended for powered systems.

Load Capacity (LBS.)

Frame I.F.	Bearing #		Frame I.F.	Bearing #	
	BUSHING	1L8		BUSHING	1L8
12	24	10	33	***	***
15	15	10	36	***	***
18	10	10	39	***	***
21	7	10	42	***	***
24	6	9	45	***	***
27	***	7	48	***	***
30	***	***	51	***	***

*** Longer lengths are not recommended exceeding a load capacity of 5 pounds.